

Stronger and more durable than the concrete panels!

Curing floorboard

Diban



You can choose from 4 types of lineup

Size 3×6·4×8




Thickness 13mm·8mm

**Light! Strong!
Not decompose!
Can be used repeatedly!**




910mm
×
1820mm

15kg

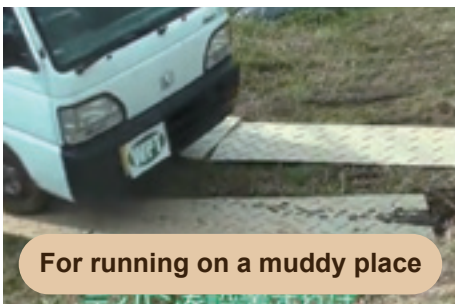


For running on a muddy place

If you lay Diban on the rice field, in the greenhouse, or on the muddy field, trucks and dollies can smoothly run.

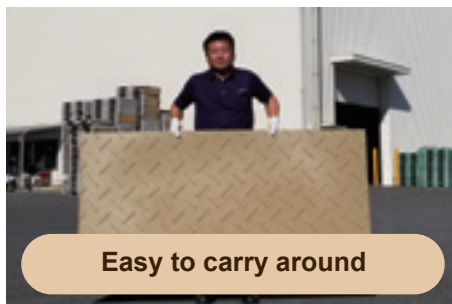


Easy to carry around

Diban is really light because the thin-type (3 x 6 in size) weighs 15 kg and another type (4 x 8 in size) weighs 27 kg. Also, the thick-type has handles and is easy to carry around.

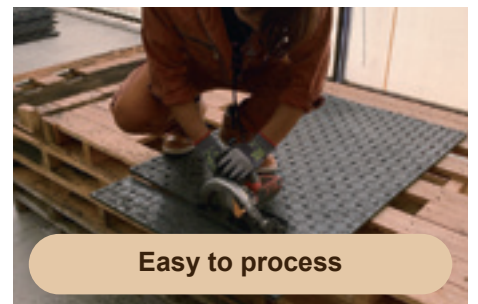

Easy to process

As you can cut Diban with an electric saw, you can adjust the size to fit it to the place where you lay on.

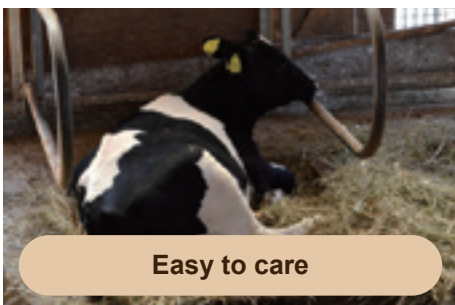

Easy to care

Even if Diban gets dirty, it can be easily washed off with water and can be used as repeatedly. Also it is best for livestock passages.



Natural board color


We adopt a color similar to wood, so Diban fits into fields and rice fields. (Black color can be provided on a build-to-order basis.)

"Diban" solves various problems farmers and fattening farmers have!


Product Specifications

	Diban (Thickness 8 mm)		Diban (Thickness 13 mm)	
Size	1219 mm × 2438 mm	910 mm × 1820 mm	1219 mm × 2438 mm	910 mm × 1820 mm
Weight	27 kg	15 kg	39 kg	21 kg
Non-slip	Surface: 5 mm in high / Back: Flat		Surface: 2 mm in high / Back: Flat	
Connection holes	None		Handle hole / Connection holes	
Color	Brown			
Material	Recycled plastic			


Thickness 8mm (4 shaku x 8 shaku-sized)

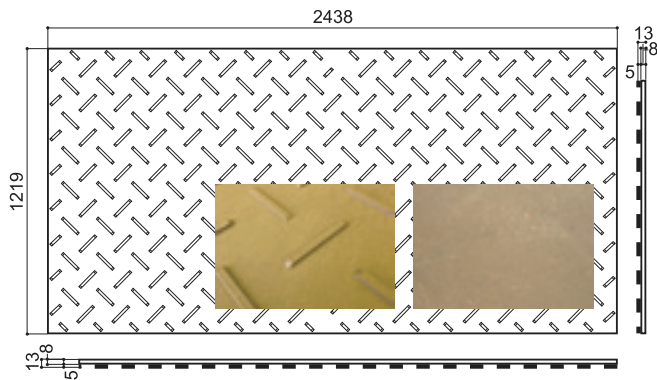


Thickness 13mm (4 shaku x 8 shaku-sized)

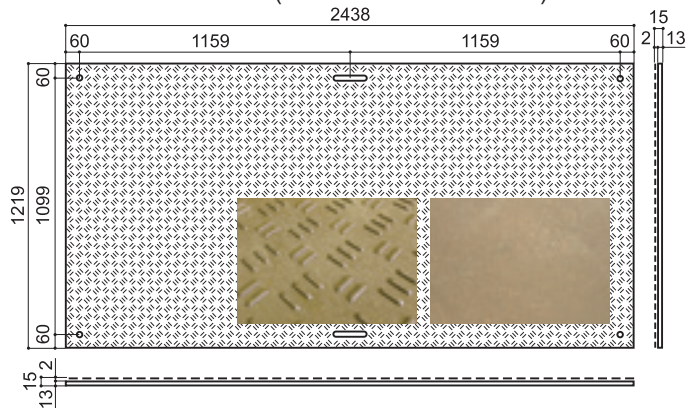

Thickness 8mm (3 shaku x 6 shaku-sized)

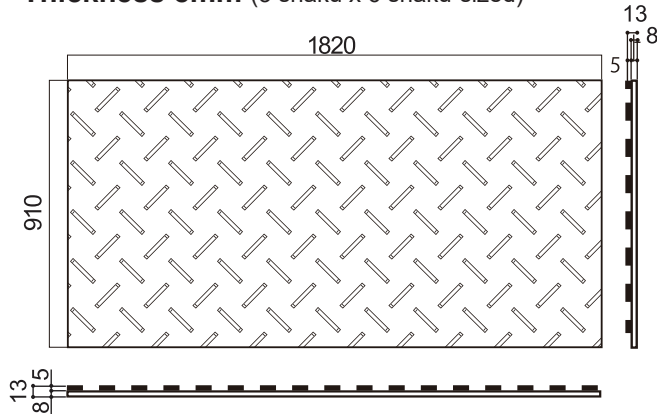

Thickness 13mm (3 shaku x 6 shaku-sized)

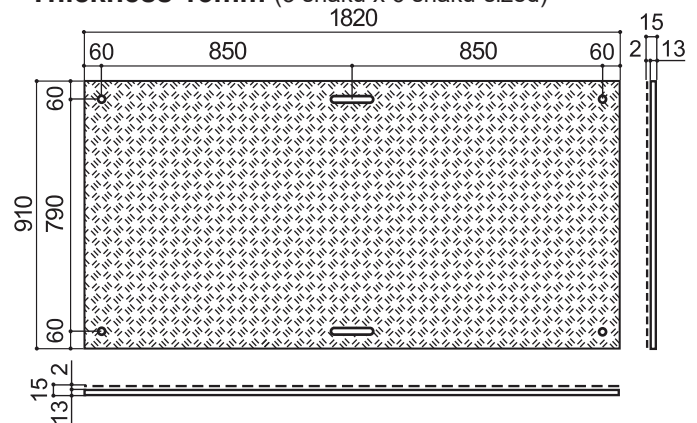

Precautions for use

- Be sure to wear working gloves when constructing, removing or moving, etc. Diban by hands.
- As Diban is lightweight, deviations may occur due to the vehicle running motion.
- Diban may be blown off by a gust of typhoon, etc.. If stormy weather is expected, fix or remove it.
- As Diban is a resin product, it may warp or shrink due to a sudden change in temperature depending on the season.
- Running motion of iron crawler vehicles on Diban can lead to damage and premature attrition.
- There is a risk of breakage under conditions where sharp objects such as crushed stones and concrete debris are stuck into the floor.
- Lifting the fixed floorboard or moving the floorboard with placing the objects on may cause damage. Release the floorboard or remove the objects off before carrying.

Prohibited matter



To use in conditions where there are some spaces under the floorboard such as gutters or steps.



To use as a floorboard for crane outriggers.



To use on soft ground or ground that may collapse.



To use fire such as bonfire or welding sparks on the product.



Manufacturer

Wood Plastic Technology Co., Ltd.

〈Tottori Head Office and Factory〉

Techno Park Nadate, 605-33 Tani, Kurayoshi City, Tottori
682-0954 Japan

<http://www.wpt.co.jp/>

Distributor/For inquiry and order